

# Network Video Recorder

## NVR202E Series




### Key Features

- 8/16/32-channel input
- Third-party IP cameras supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Up to 4 Megapixels resolution recording
- Accurate retrieval, instant playback
- 2 SATA HDD up to 12 TB
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access


## Specifications

Model	NVR202-08E	NVR202-16E	NVR202-32E
<b>Video/Audio Input</b>			
IP Video Input	8-ch	16-ch	32-ch
Two-way Audio Input	1-ch, RCA		
<b>Network</b>			
Incoming Bandwidth	80Mbps	160Mbps	200Mbps
Outgoing Bandwidth	96Mbps		
Remote Users	128		
<b>Video/Audio Output</b>			
HDMI/VGA Output	HDMI/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz		
Recording Resolution	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Audio Output	1-ch, RCA		
Synchronous Playback	8-ch	16-ch	
<b>Decoding</b>			
Compression	H.264		
Live view /Playback	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Capability	2 x 4MP@20, 4 x 1080p@30, 8 x 720p@25	4x 4MP@20, 6 x 1080p@25, 16 x 720p@25, 32 x D1	
<b>Hard Disk</b>			
SATA	2 SATA interfaces		
Capacity	up to 6TB for each disk		
<b>External Interface</b>			
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface		
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0		
<b>General</b>			
Power Supply	12V DC		
Consumption ( without HDD )	≤ 8 W		
Working Temperature	-10°C ~ + 55°C ( +14°F ~ +131°F )		
Working Humidity	10% ~ 90%		
Dimensions	44 × 360 × 254mm ( 1.7" × 14.2" × 10.0" )		
Weight ( without HDD )	≤ 1.42 Kg ( 3.13 lb )		

## Dimensions

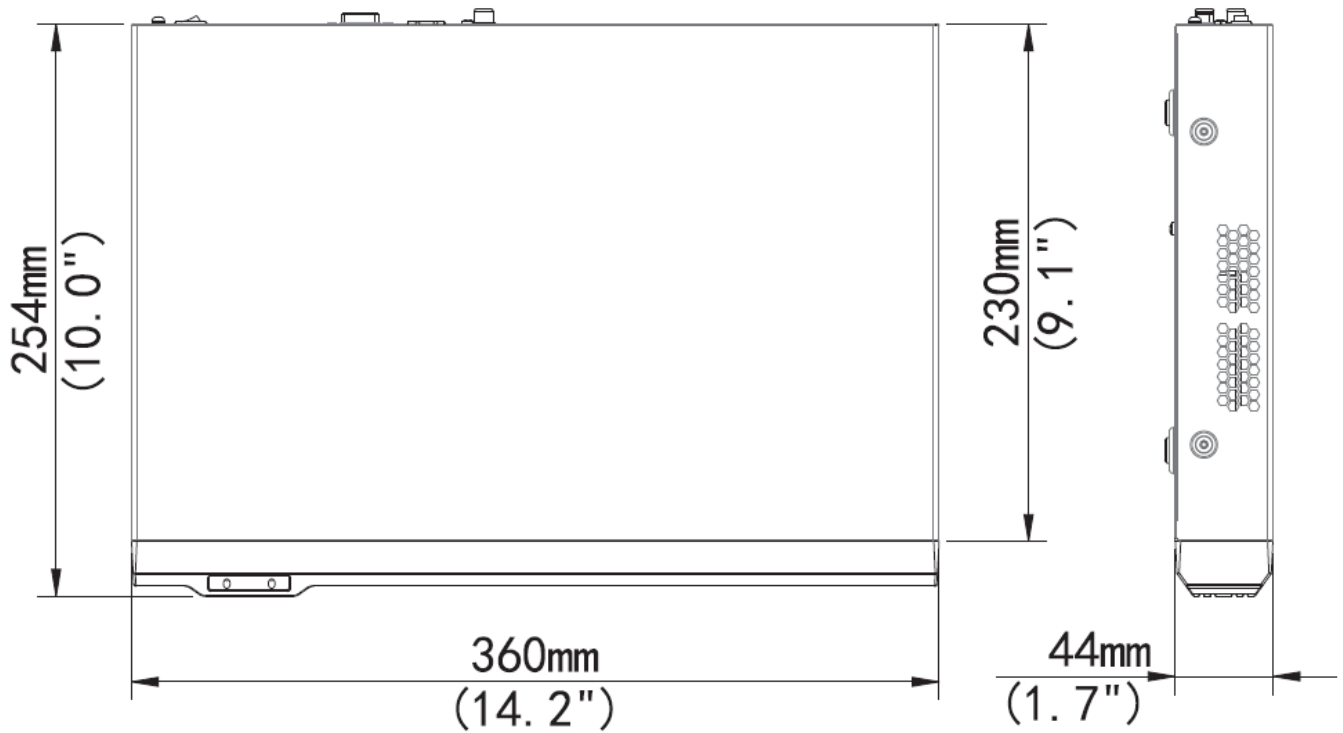

## Rear Panel

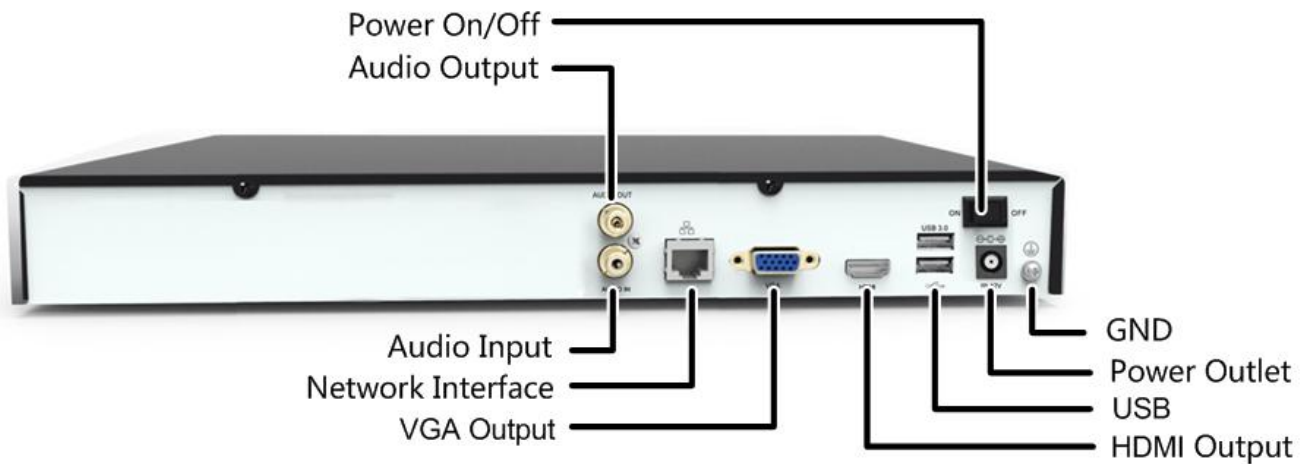

**Zhejiang Uniview Technologies Co., Ltd.**

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2011-2017 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.